

Crescent Path Marker

Technical specification / CRESENTPATH

Contents


Select a section or page number to jump to it. Use Contents in the footer to return.

01 Product overview	2
02 Light & electrical	3
03 Mechanical & construction	3
04 Service & circularity	3
05 Ordering	3

Generated from current saved product details, specification notes and published FAQs. Downloaded copies are dated snapshots. Regenerate after changes. Unanswered fields are omitted. Check suitability for your project before installation.

01 Product overview

Crescent Path Marker

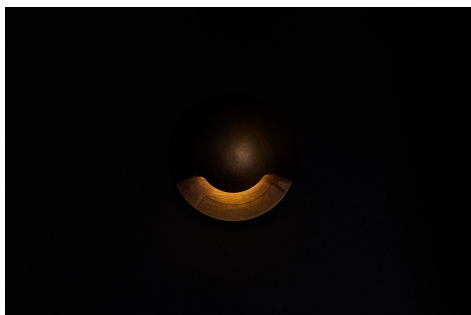

Product code	CRESENTPATH
Product reference	10107
Rated power (standard LED)	1.6 W
Ingress protection	IP68
Standard cable length	2.00 m
Warranty period	10 years

Product record updated: 2026-09-20 14:16:03

Specification notes revision: 0

02 Light & electrical

Available LED options (colour / power)	2700K / 1.6W 2700K / 2.6W 2700K / 3.6W 2200K / 1.6W Monochromatic Amber (Better in the case of Turtle/Bats/Wildlife) / 1.6W
--	---

03 Mechanical & construction

Body material by finish	Black powder coat: CNC machined 6082-T6 aluminium Green powder coat: CNC machined 6082-T6 aluminium Brass: CNC machined Brass CZ121 Copper: CNC machined Copper C101 CorTen Powder coat: CNC machined 6082-T6 aluminium CUSTOM RAL: CNC machined 6082-T6 aluminium Terra brown (formerly Bronze (RAL 8040)): CNC machined 6082-T6 aluminium Solid Bronze: CNC machined Bronze CA104
Available finishes	Black powder coat; Green powder coat; Brass; Copper; CorTen Powder coat; CUSTOM RAL; Terra brown (formerly Bronze (RAL 8040)); Solid Bronze

04 Service & circularity

TM66 assessment score	2.6
-----------------------	-----

05 Ordering

Available options	Pre aging of Brass, Copper or Bronze; (1.6W only) Super bright directional LED - subject to darkness, defined triangle 1.5->5m; Upgrade CRI to 95 - Not applicable to Amber and not available on 3.6W
-------------------	---