


EYELID LIGHT SPECIFICATION

*Hudson
lighting*

| | |
|---------------------------------|--|
| Power | 1W standard (350mA) 2W option (350mA) 3W option (350mA) |
| Ingress protecton rating | IP68 - Each tested at 2m for 24 hours |
| Cable | 0.5mm PVC 2m - Longer on request |
| LED Colour | 3000K standard 4000K standard 2700K standard 5000K option 6500K option |
| Optics | 60 degree single opening standard. Any other available on request including number |
| CRI | 90+ |
| Material | Tops: 316 Stainless steel Brass Copper Black powder coat Nato green powder coat CorTen powder coat Custom RAL |
| Warranty | 5 Years |
| Efficiency | 187 lm/W at chip |
| Input Power | 350mA wired in series |
| Replacement Components | LED reverse voltage circuit board with cable Top Bottom Optic if applicable |
| Light Diameter | 62mm |
| Light Depth | 18mm |
| Cut Out Diameter | 25mm |
| Depth | 45mm |

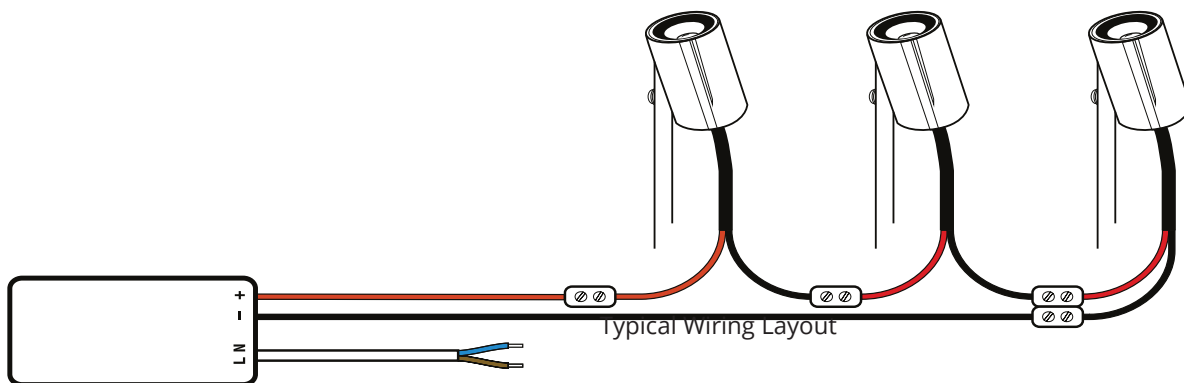

MADE IN ENGLAND

hudsonlighting.co.uk